

RS5110 **RS**5220

VALUE SERIES DIGITAL PROGRAMMABLE THERMOSTATS



Comfort Control With Energy Savings

The Robertshaw[®] RS5000 thermostat family is Simply the Right Choice[™] when it comes to programmable temperature controls that can save energy and money.

With the comfort, convenience, and efficiency features that homeowners and contractors want, the RS5000 family provides EnergyStar[®] and California Title 24 compliant features for an affordable price.

- Fully programmable with soft touch keys to easily set four events per day AND 5-2 day scheduling.
- Pop-up Wizard to customize thermostat settings with an instant start-up menu.
- Vacation setpoint override to reduce energy use while away from home.

The RS5000 thermostats are fully compatible with all standard 24V AC heating and cooling systems. Additional compatibility with multi-stage gas/electric furnaces and heat pump systems is available in the RS5220 model.

Add in easy installation, Contractor ID option, and quality you can depend on, and you have the Robertshaw RS5000 thermostat family -Simply the Right Choice.

GAS OIL **ELECTRIC** HEAT PUMP MILLIVOLT

5 - 2 Day Programmable RS5110 - 1 Heat / 1 Cool RS5220 – Universal Control up to 2 Heat / 2 Cool

Features and Benefits

Universal Control up to 2 Heat / 2 Cool – RS5220 only Operates on both multi-stage gas/electric furnaces and heat pumps means less inventory.

Auto Changeover

Switches automatically between heating and cooling for constant home comfort.

Pop-Up Wizard

Launches instant installation menu to guickly enter the settings for programmed thermostat functions.

Bigger Brighter Backlight with Nightlight Option

Makes viewing and setting the temperature easier any time of the day.

Worry-Free Memory Retention

Maintains set point and programmed parameters, even during power outages.

Easy Change Battery Access

Provides drop down removable compartment for guick battery replacement.

Circulating Fan

Maintains optimal air circulation between demand cycles for improved comfort with minimal energy use.

Low Temperature Freeze Protection

Turns on heat automatically when temperature goes below 41°F. Protects pipes from freezing.

Adjustable Temperature Differential and Upstaging

Provides for full selection of parameters to deliver maximum comfort or energy savings.

High and Low Setpoint Limits

Protects the heating and cooling systems by limiting temperature settings.

An ISO 9001 – 2000 Certified Company












RS5110 RS5220

VALUE SERIES DIGITAL PROGRAMMABLE THERMOSTATS

Terminal Designations

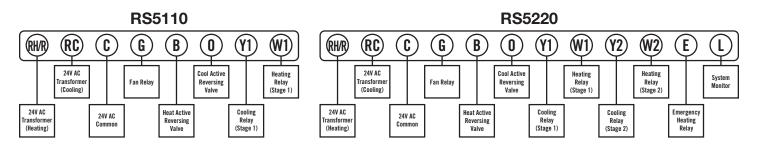

Technical Specifications

| Product Weight | 12.8 oz. |
|-----------------------|---|
| Electrical Rating | 24V AC (18-30V AC) 1 amp maximum load per terminal 3 amp total maximum load (all terminals combined) |
| Temp. Control Range | 45°F to 90°F (7°C to 32°C) |
| Accuracy | ± 1°F (± 0.5°C) |
| Power | 24V AC with battery back-up OR 3.0V DC (2 AA alkaline batteries included) |
| System Configurations | Multi-stage gas, electric, oil, heat pump and millivolt systems |
| Terminations | R\$5110 – RH/R, RC, C, G, B, O, Y1, W1 R\$5220 – RH/R, RC, C, G, B, O, Y1, W1, Y2, W2, E, L |

Replacement Chart

| RS5110 | | |
|---------------|------------|--|
| Robertshaw® | 9600, 9610 | |
| Braeburn® | 5000, 5050 | |
| Lux | PSPA711 | |
| Honeywell | TH4110D | |
| White-Rodgers | 1F80-0471 | |
| RS5220 | | |
| Robertshaw® | 9615, 9620 | |
| Braeburn® | 5100, 5200 | |
| Lux | PSPA722E | |
| Honeywell | TH4210D | |
| White-Rodgers | 1F85-0471 | |

Verify specific application requirements before substitution.

Shipping Specifications

| Individual Carton Dimensions | 6.75" x 4.375" x 1.625" |
|------------------------------|-------------------------|
| Master Carton Quantity | 6 |
| Master Carton Dimensions | 9.25" x 5.625" x 7.625" |
| Master Carton Weight | 5 lbs. |
| Pallet Quantity | 1170 |
| Pallet Dimensions | 40" x 48" x 48" |



191 E. North Avenue Carol Stream Illinois 60188 USA Customer Service Telephone 1.800.304.6563 Customer Service Facsimile 1.800.426.0804 HVACCustomerService@invensyscontrols.com www.invensyscontrols.com ©2008 Invensys Controls

3505 Laird Road Unit #14 Mississauga Ontario LSL 5Y7 Canada Customer Service Telephone 1.800.387.7978 Customer Service Facsimile 1.905.828.1265 CanadianCustomerService@invensyscontrols.com

For Technical Service Telephone 1.800.445.8299 Facsimile 1.630.260.7243 technicalservice@invensys.com

Invensys[®] and Robertshaw[®] are trademarks of Invensys plc., its subsidiaries and/or affiliated companies. All other brands mentioned in this report may be the trademarks of their respective owners.