

THERMAL

THERMAL PRODUCTS PTY. LTD.
www.thermalproducts.com.au

178 - 180 HOLT PARADE
THOMASTOWN VIC 3074




PH - (03) 9464 0822

FAX - (03) 9464 0630


Sales@thermalproducts.com.au

Refrigeration Thermostats Connection Diagrams


C COMPRESSOR L LIGHT

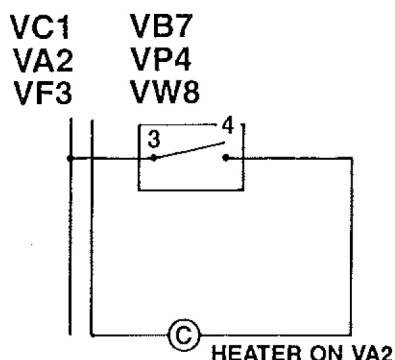


VT9 Replacement for Two-Temperature Domestic Refrigerators (Circuit Options)

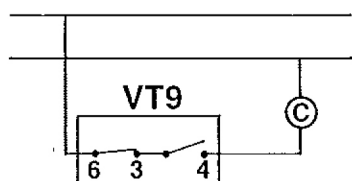

CONTROL WITH "OFF" POSITION FOR
HEAT LEAKAGE DEFROST

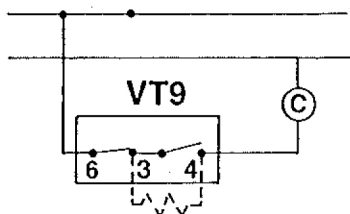

CONTROL WITHOUT "OFF" USING
HEATER ASSISTED DEFROST

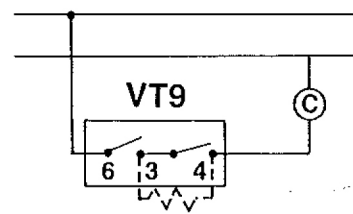

CONTROL WITH "OFF" USING HEATER
ASSISTED DEFROST

Electrical Ratings:

6 A inductive at 250V ~ except VW8.

VW8 16 A inductive at 250V ~

(Note that VS5/VR6 controls are rated 6 A 250V ~ inductive on mains switch (terminals 3-4) and 1 A inductive 250V ~ on signal switch contacts (terminals 6-3))



Settings:

All controls leave the factory in the cold position (fully clockwise). The temperature within the appliance can be increased by turning the dial knob in a counter clockwise direction (All Varifix are packed with instructions for use and are printed in six languages).

CONNECTIONS IF REPLACING ROBERTSHAW RC-94852-2 WITH RANCO VT9

	ROBERTSHAW	RANCO
LINE	3	4
COMPRESSOR	2	3

ROBERTSHAW
DRO58C



RANCO
DRO58
DRO58B